



EN54 Range 24V dc 1, 2, 5, 10A Power Supply Units



Product Overview

The new EN54 range of switch mode power supplies has been specifically designed for EN54 compliant fire systems.


Available in either 1A, 2A, 5A or 10A versions they are certified to EN54-4:1997, A1:2002 & A2:2006.

The units include intelligent battery charging using Context Plus efficient *EcoCharge* technology, possess mains & battery monitoring with independent volt-free outputs and also feature battery deep discharge protection in the event of a prolonged mains failure.

The inclusion of LED indicators provides quick diagnostics of the status of the power supply, while a variety of enclosures offer the installer a choice of standby battery backup options (see table).

Features

- 27.6V dc output
- Cost effective switch mode technology
- Energy efficient
 - More efficient in operation
 - Saves power reducing power bills
 - Longer life in the field
 - Less prone to failure
- Intelligent battery charging and monitoring using *EcoCharge* technology
- Deep Discharge Protection
- Remote fault signalling
- Full rated current to load plus additional current for battery charging
- LED indication:
 - Mains status
 - Output fault
 - Battery fault
 - Charger fault
- Volt-free fault output - EPS:
 - Mains fail
- Volt-free fault output - PSU fault:
 - Battery fault
 - Charger fault
 - Loss of output
- Mains transient protection
- 10A version can charge up to 2 x 65Ah batteries housed in a separate enclosure (*BATT-BOX-65*)
- 3 Year warranty

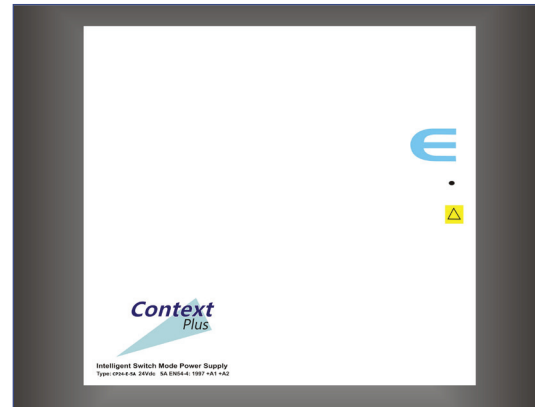

CP24-E-5A

Models

Enclosure	Rating (A)	Max Battery Size
T	1A	2 x 12V 1.2Ah
C	1A	2 x 12V 7Ah
C	2A	2 x 12V 7Ah
E	2A	2 x 12V 17Ah
C	5A	2 x 12V 7Ah
E	5A	2 x 12V 17Ah
E	10A	2 x 12V 17Ah
H	8A	2 x 12V 38Ah

E + BATT-BOX	7.2A	2 x 12V 65Ah
-----------------	------	--------------

Technical Information

Mains input	93–264V ac
Output	27.6V dc
Maximum current	See above table
Operating temperature	-10°C to 40°C at 95% RH

Product Dimensions (mm)

T Models	300H x 240W x 60D
C Models	275H x 330W x 80D
E Models	420H x 400W x 80D
H Models	420H x 420W x 180D
BATT-BOX-65	534H x 465W x 268D

Approvals

Certified by UL (EN54-4:1997 +A1: 2002 +A2: 2006)
CE Mark RoHS Compliant



Export House,
175 Mauldeth Road,
Withington,
Manchester M14 6SG

Tel: +44 (0) 161 257 2541
Email: contextplus@xportsales.com

www.contextplus.co.uk

For UK & European sales enquiries:
charbel@xportsales.com

For Exports sales enquiries:
xportsales@xportsales.com