

MOTOR DRIVEN DOME BELLS CP250BR





DESCRIPTION

Context Plus Motor Driven Alarm Bells **CP250BR** are professionally designed to meet the special requirements of fire alarm/release systems where low power consumption and high sound output is essential. Due to its low current drain, high level sound can be achieved with multiple units on a single 2-wire output circuit. The simplicity of the design constructs of high quality material and a heavy duty micro motor with built-in varistor suppression elements ensuring reliability and long life. Designed to meet the tough requirement of EN54-3:2001, Model **CP250BR** are easy to install and capable of operating under most adverse conditions.

CP ADVANTAGES

- Plug-in power supply.
- Interchangeable base suitable for surface mounting.
- Two gong sizes – 6 and 8 inches.
- Zero standby current.
- Low current consumption.
- Louder mechanical Resonant Tone.
- Integral RFI suppression to minimize induced noise on the alarm circuit.
- DC Voltage available in 12V and 24V.

DECIBEL LEVELS

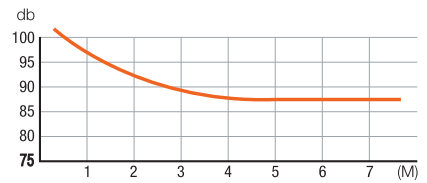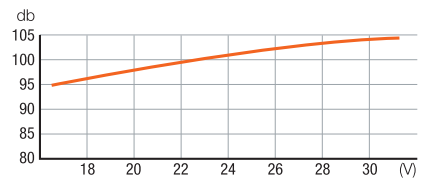


DECIBEL RATINGS/SPECIFICATIONS


DC Type		Decibel rating @ 1m (3ft)	
Voltage	Amps	150mm (6")	200mm (8")
12	0.05	95 dB	98 dB
24	0.03	95 dB	103 dB
Net/Gross Weight		748/812g	1130/1280g

Specifications are subject to change without prior notice.

Front View of Universal Base for 6" and 8" bells



MOUNTING INSTRUCTION
The bell must be mounted with its striker pointing downward.

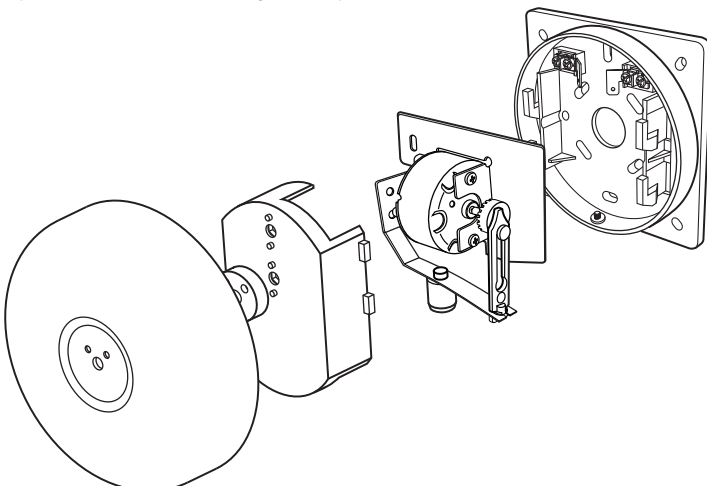

Context Plus

Context Plus Limited
175, Mauldeth Road,
Manchester, M14 6SG,
United Kingdom
Tel: +44 (0)161 257 2541
Fax: +44 (0) 161 225 8817
Email: contextplus@xportsales.com